


144GPH / 2.4GPM







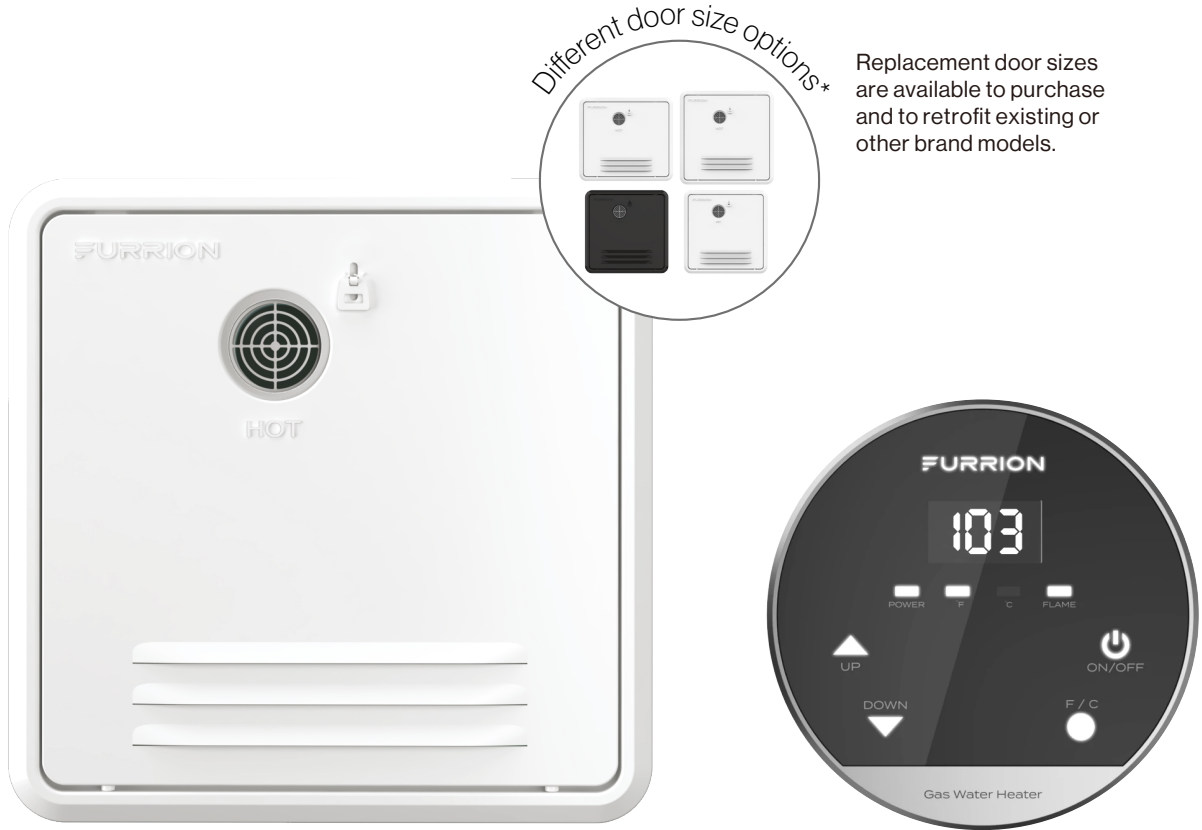


Tankless Gas Water Heater




Tankless Gas Water Heater with Door

Wall Thermostat


Main Features

-  HOT WATER CAPACITY
-  CONSISTENT TEMPERATURE
-  ELECTRONIC IGNITION
-  OVER TEMP. PROTECTION
-  AUTO TURN OFF
-  BLOWER BLOCK PROTECTION
-  THERMOSTAT
-  LOW PRESSURE ALARM
-  PRESSURE RELIEF VALVE


Main Unit

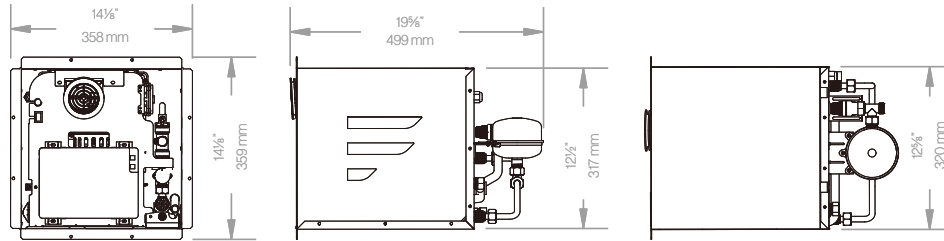

Thermostat

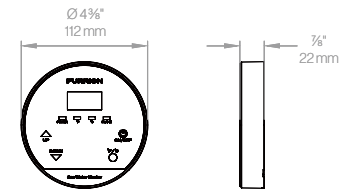

Door (Sold Separately)

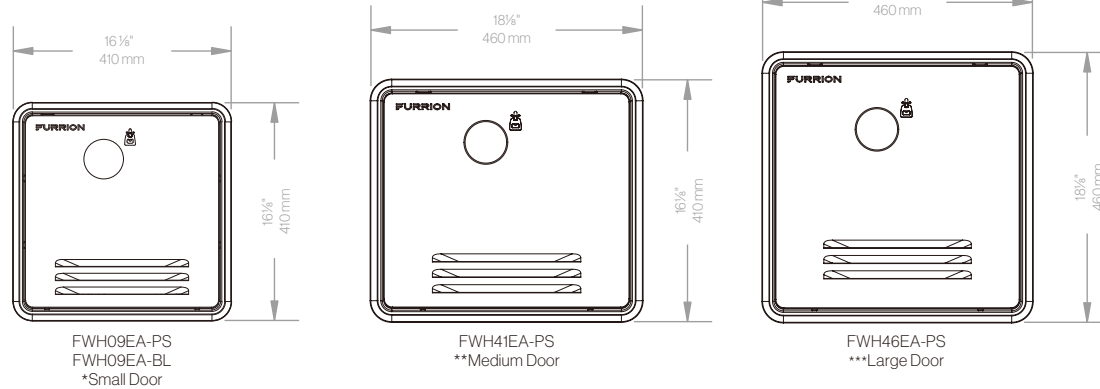

Specifications

| | |
|--------------------------------|--|
| Temperature Setting Range | 95 - 124°F (35 - 51°C) |
| Default Setting Temperature | 115°F (46°C) |
| Temperature Stability | Temperature Stabilizer Technology ±1.8-2.6°F (1-2°C) |
| Low Water Flow Protection | Auto Cut-off <0.32GAL (1.2L)/min |
| Over Current Protection | 10amp Fuse |
| High Water Pressure Protection | ≥87psi (6bar) Auto Release Pressure Valve |
| Over Temperature Protection | Software Protection: 136°F, ±1.8°F (76°C, ±1°C) Thermal Sensor: 135°F, ±14.4°F (75°C, ±8°C) |
| Input BTU | 13,000 ~ 60,000BTU |

Specifications

| | |
|--------------------------------|---------------------------------------|
| Gas Supply | LP (Propane) Only |
| Gas Inlet Pressure | 11" - 14" inch WC |
| Electric Power Supply | DC 12V 3A |
| Working Pressure (Water Inlet) | 10 - 65 PSI (0.68 - 4.5bar) |
| Water Flow | 0.32GAL (1.2L)/min - 2.4 GAL (9L)/min |
| Thermal Efficiency | ≥81% |
| Gas Line Connector | UNF 5/8" - 18 |
| Water Inlet Connector | 1/2" NPT |
| Water Outlet Connector | 1/2" NPT |
| Operating Noise | ≤65dB |
| Automatic Ignition | ✓ |
| Exhaust Blocking Protection | ✓ |

| Dimensions & Weight | Main Unit | *Small Door | **Medium Door | ***Large Door |
|---------------------------------|--|--|--|--|
| Product Dimension (W x H x D) | 12 3/4 x 12 x 20 3/4" 324 x 320 x 527mm | 16 1/8 x 16 1/8 x 1 1/4" 410 x 410 x 33mm | 18 1/8 x 16 1/8 x 1 1/4" 460 x 410 x 33mm | 18 1/8 x 18 1/8 x 1 1/4" 460 x 460 x 33mm |
| Packaging Dimension (W x H x D) | 22 3/4 x 16 x 16 1/8" 577 x 407 x 410mm | 18 1/4 x 19 5/8 x 3 1/8" 465 x 498 x 78mm | 20 1/4 x 19 5/8 x 3 1/8" 515 x 498 x 78mm | 20 1/4 x 21 5/8 x 3 1/8" 515 x 548 x 78mm |
| Net Weight (lbs/kg) | 27.6lbs / 12.5kg | 3.7lbs / 1.7kg | 4.6lbs / 2.1kg | 5.3lbs / 2.4kg |
| Gross Weight (lbs/kg) | 36.3lbs / 16.5kg | 5.5lbs / 2.5kg | 6.4lbs / 2.9kg | 7.1lbs / 3.2kg |

* Retrofit door for Suburban™ 4/6 gallon water heater model.

** Retrofit door for Atwood™ 6 gallon water heater model.

*** Retrofit door for Suburban™ and Atwood™ 10 gallon water heater model.

